

AirWerx 55

Dehumidifier


Crawl space & Basement Dehumidifier



Patented



Winkle free tube



MERV-1 Filter



Remote Control (Optional)



Cable

Specifications

| Installation type/place | Small spaces - basements, crawl space, kitchen, laundry room. |
|------------------------------|---|
| Power | 115V/60Hz |
| Size limit | Up to 1,200 Sq. Ft. |
| Air flow | 120 CFM |
| Installation type | Portable |
| Remote control | Optional |
| Display type | Digital. |
| Sound level | <52 DBA |
| Draining | Gravity draining |
| Compressor type | Rotary |
| Defrosting control system | Auto Defrosting |
| Bypass air sensor | Yes. |
| Memory starting | All set settings remain the same even after a restart |
| Automatic humidistat control | Yes. |
| Easy handing | Plug and play design - easy to operate |
| Weight | 44 lbs |
| Dimensions | Depth: 19.2 in. Height: 13.3 in. Width: 12.2 in. |

Note: to maintain the effectiveness and efficiency of the AirWerx 55 dehumidifier, it is important to ensure the space the dehumidifier is installed is airtight. This guarantee that the dehumidifier is able to maintain the humidity level low (below 50%). The biggest source of moist indoors is outside humid air.

Key Features

- 1.Capacity:
 - 1) 53 Pints/Day, AHAM 80°F, 60%;
 - 2) 113 Pints/Day, Saturation (90°F, 90%).
 - 3) Size for: 1,200 Sq. Ft.
- 2. Wi-Fi controller: HVAC Remote System.(Coming soon)
- 3. Outlet: 6" big diameter air outlet, focused dehumidifying.
- 4. Draining: Gravity draining (no pump)
- 5. Supper COP: 2.27L/KWH.

Overview

The AirWerx 55 is able to extract over 55 pints of moisture a day. This ensures you are protected from water damage and avoid any health complication caused by excess moisture. Its sheet metal housing guarantees durability by protecting the dehumidifier from damage while being moved.

Equipped with multilayer aluminum filters that help cleanse the air off any dust and impurities, Auto defrosting system to avoid frost from forming and lowering the dehumidifier capacity. The AirWerx 55 state of the art design protects it from overheating.



EFFICIENT • LARGE CAPACITY • POWERFUL
INDUSTRY • RESIDENTIAL HOMES
STORES • RESTORATION

AirWerx 55

Dehumidifier

Application

Compact - small - light - high capacity! These are but a few of the words that can be used to describe BaseAire AirWerx 55. The AirWerx 55 is built for all areas dehumidification, thanks to its small size and high capacity makes it perfect to be deployed in any room in the house. Perfect for basement, crawl spaces or any other tight moist spaces in the house.

All purpose use

- AirWerx 55 is equipped with a duct (150mm in diameter) for focused dehumidification.
- Remote controlled – the AirWerx 55 also you to control the dehumidifier setting remotely. Which saves time-saving and convenient.

Capacity

This unit is able to extract at least 53 pints of moisture per day, which is very impressive comparing its size and lo

Support

All our customers enjoy effective support, thanks to your technical support team via phone, email or via live support. This ensures that all the issues encountered by our customers while using the AirWerx 55 are resolved promptly.

Warranty

At BaseAire all over have a **5**-year unit warranty. All our products are tested and proven to be fully operational before being released to the market. Our team of world engineers works tirelessly to ensure the AirWerx 55 unit will exceed your expectations.


Get rid of the mold and odor-buy the **AirWerx 55** today

Performance


Equipped with a humidistat, the AirWerx 55 is able to sense a change in humidity and regulate the humidity levels accordingly.

Also equipped with durably coated coils with the stainless side plate.


Built to remain fully operational in low temperatures and air flow issues spaces like the crawl space or the basement.

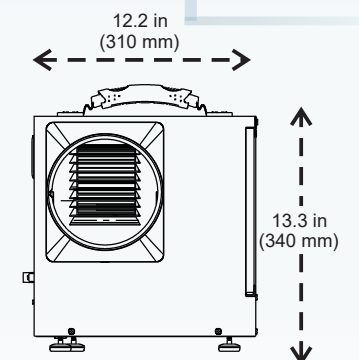

LEFT

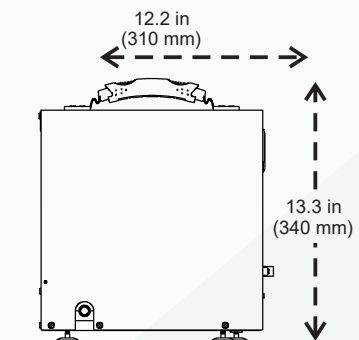

RIGHT

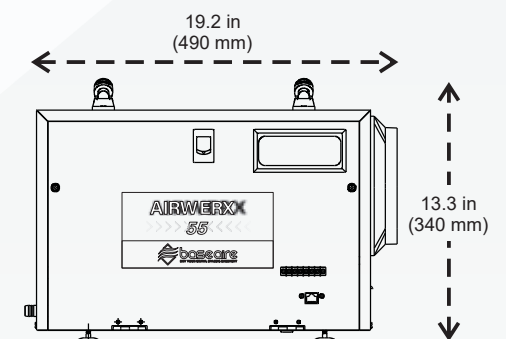

FRONT

Specifications subject to change without notice.

Web: [www .baseaire.com](http://www.baseaire.com)
E-mail: sales@baseaire.com
Tel: 1-888-641-8862